

S



EL



D

1 GENERAL INFORMATION

- **Material:** Brass 5mm
- **Weight:** 120g **EL** / 120g **S** / 200g **D** / 280g **T**
- **Spacing between screws:** 60mm
- **Fixing:** With screw or without screw
- **Fitting:** 3 minutes screw / 1 minute magnet
- **Compatible flush-mount boxes:**
 - LEG 080031 **S**
 - LEG 080032 **D**
 - LEG 080033 **T**
 - ARD 432002 **EL**



2 FINISHES




Jade
434



Atlas
433




Fawn
435



Shadow
439








Coslan
430




Wave
432

3 FORMATS Dimensions in mm

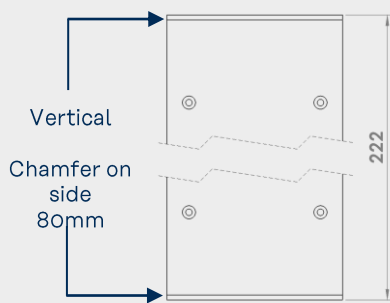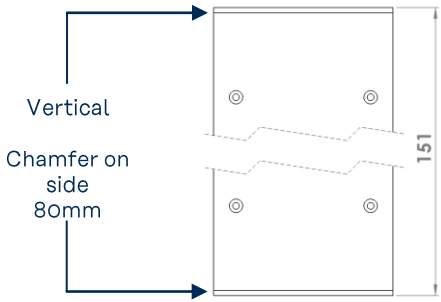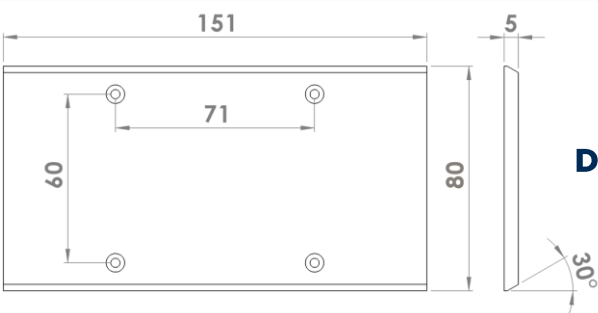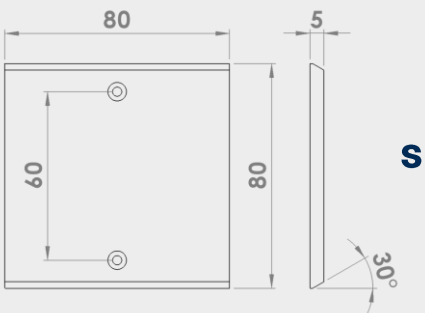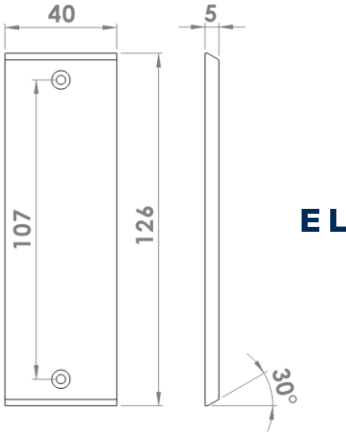

4 AVAILABLE FUNCTIONS

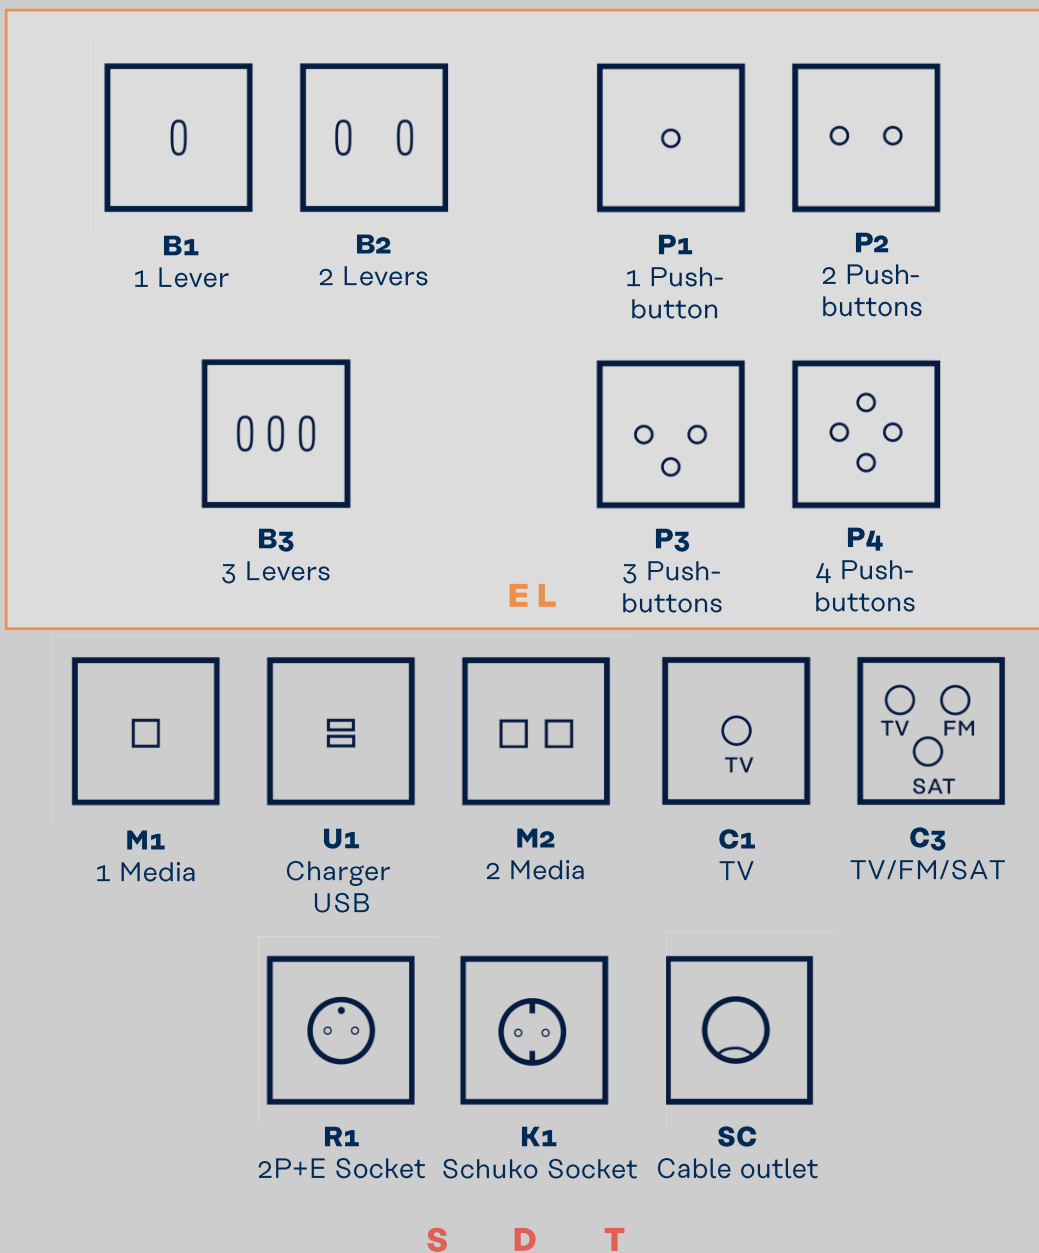

GLOSSARY

Lever: toggle / push-button / changeover / roller shutter

Push: push-button


Media: RJ45 / HDMI / USB DATA / HP

Multi: detector / badge reader / international sockets




5 FITTING

SCREW COVER PLATE

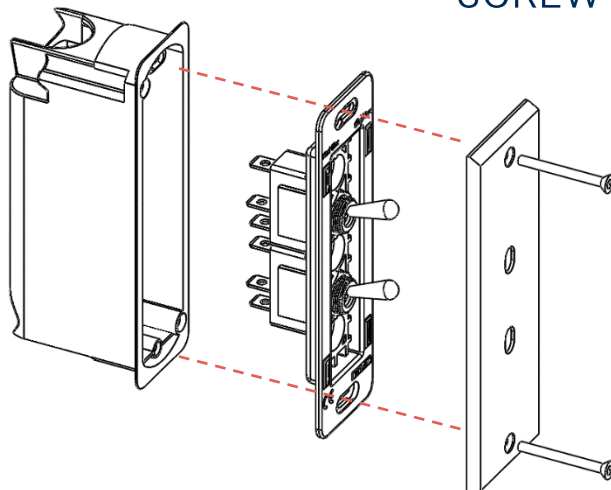

1. Wire the mechanism according to the corresponding diagram.
2. Simply engage the cover plate + mechanism assembly into the standard flush-mount box and screw in (2 Torx screws supplied).
3. Ensure vertical position is correct.

MAGNETIC COVER PLATE

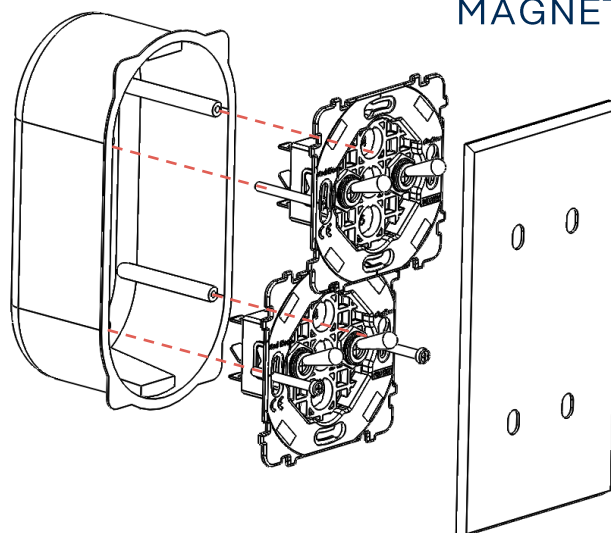

1. Wire the mechanism according to the corresponding diagram.
2. Place the mechanism(s) into the standard flush-mount box and screw in place. Ensure vertical position is correct.
3. Move the front panel up to the mechanism so the magnet can act.

