


E



EL



S

1 INSTRUCTIONS AND RECOMMENDATIONS




Switch off the mains before commencing any work



Strip the wires back for about 12mm
Cable cross-section 0.5 min / 2.5mm² max



Mechanisms with screw terminals



For single units, use casings 50mm deep,
diameter 67 or 68mm

2 WIRING


 N neutral – blue cable

 L phase – red cable

  earth – green/yellow cable


Step 1:

Crossover wiring
A1 – B6
B4 – A3




Step 2:

Wiring the switch units



230V – 50Hz



Where there are 2 toggles

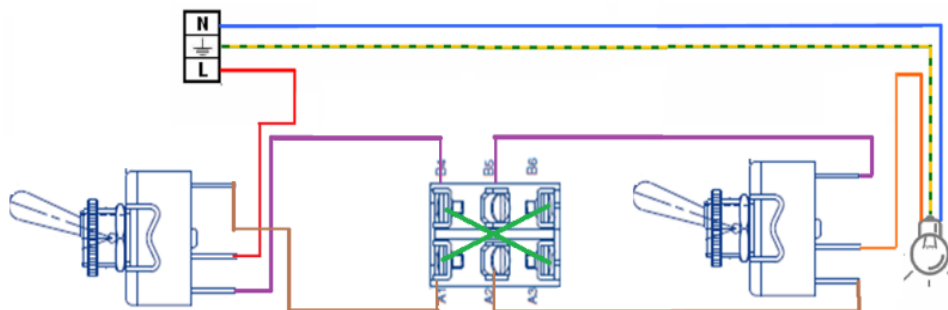

Cross switch
ON / ON

3 FITTING

After wiring according to the instructions, place the mechanism in the flush-mount box and screw on the plate as shown in the following diagrams:

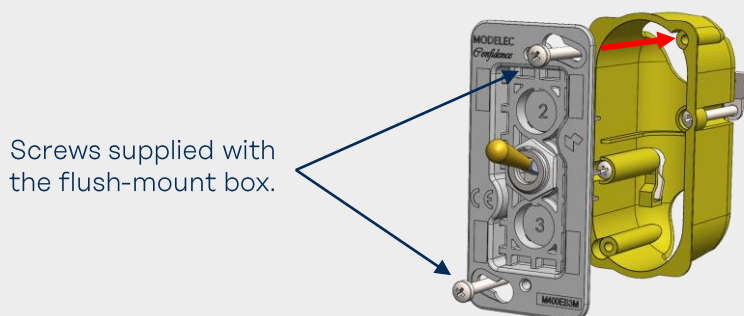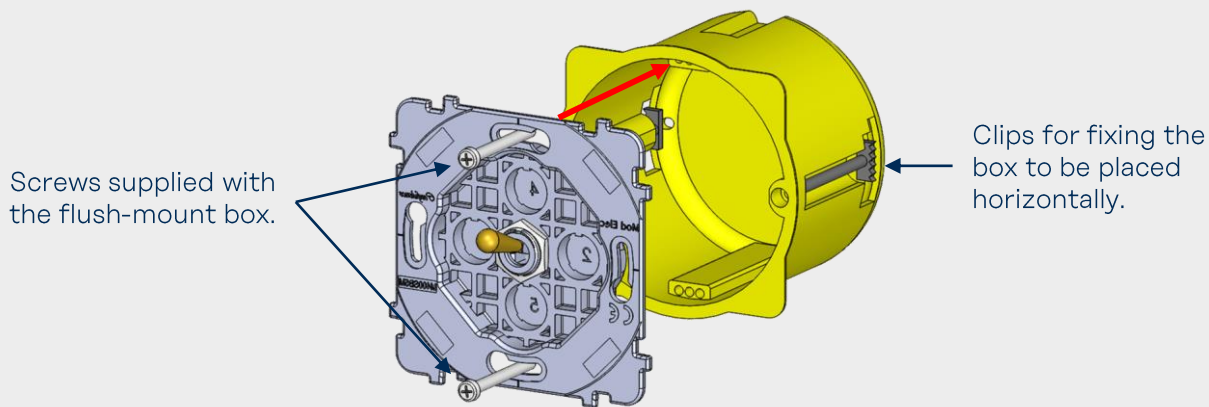

4 TABLE OF RELEVANT REFERENCES


072



073



074




Reference and description:

07x-085G E 1 CROSS SWITCH


Compatible with:

Confidence Collection




07x-085B E 1 CROSS SWITCH

Karo Collection



SPM07x-6049G EL 1 CROSS SWITCH

Confidence Collection
Fascination Collection



07x-135G S 1 CROSS SWITCH

Confidence Collection
Fascination Collection



5 CERTIFICATIONS

The 07x toggle mechanisms comply with the NF EN 60-669-01 standard, according to test report no. 149741-706752A produced by the LCIE on 13/04/2018.

