



1 INSTRUCTIONS AND RECOMMENDATIONS



Switch off the mains before commencing any work



Strip the wires back for about 12mm

Mechanism with screw terminals for the charger
"OneClick" technology with self-stripping contacts for the RJ45s



50mm deep case supplied
68mm diameter for single unit
With gasket and installation template
Total thickness : 11,6mm



Fitting 10min
(excluding floor drying)



Assembly (cover plate + mechanism) IP44
and IK08 minimum

2 WIRING

 N neutral – blue cable

 L phase – red cable


  earth – green/yellow cable

For wiring, please refer to the corresponding standard media mechanism data sheets.

3 FITTING


After wiring according to the instructions, place the gasket and the mechanism in the flush-mount box and screw the template onto the plate as shown in the diagram opposite.

Note: The total thickness of the assembly (box + gasket + template/cover plate) is 11.6 mm

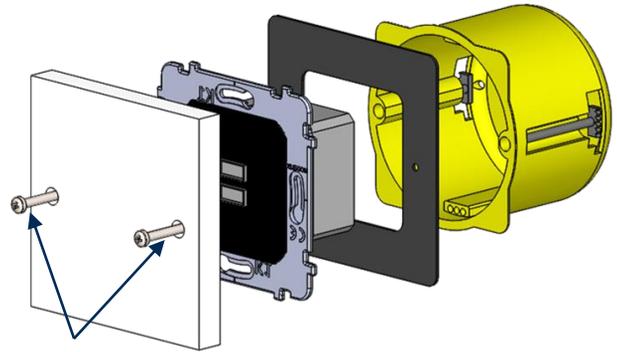

Screws supplied with the flush-mount box.

4 TABLE OF RELEVANT REFERENCES

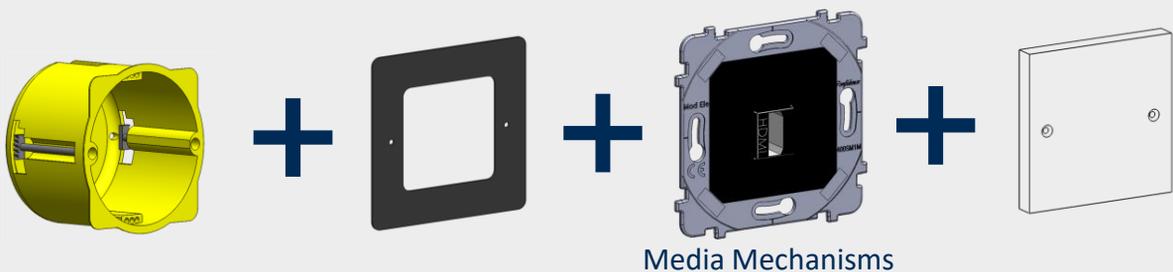

Reference and description:

- 087-390GPDS S RJ45 Cat 6
- 087-410GPDS S RJ45 Cat 6 Screened
- 087-411GPDS S RJ45 Cat 6 Screened Black
- 087-430GPDS S HDMI Black
- 087-471GPDS S HP Black
- 087-510GPDS S USB CHARGER A-A
- 087-511GPDS S USB CHARGER A-C

Compatible with:

Confidence Collection

5 CERTIFICATIONS

The installation and use of this mechanism requires prior approval from an inspection office.