

S

1 INSTRUCTIONS AND RECOMMENDATIONS



Switch off the mains before commencing any work



Strip the wires back for about 12mm
Cable cross-section 0.5 min / 2.5mm² max



Mechanisms with screw terminals




For single units, use casings 50mm deep,
diameter 67 or 68mm


2 FITTING

Place the mechanism in the flush-mount box and screw on the plate as shown in the diagram opposite.

Screws supplied with the flush-mount box.

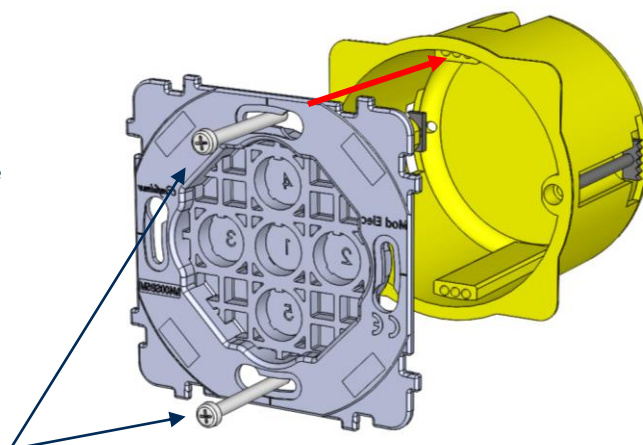

3 TABLE OF RELEVANT REFERENCES



Reference and description:

Compatible with:

07x-161G S EMPTY/BLANKING PLATE

Confidence Collection
Fascination Collection

07x-161B S EMPTY/BLANKING PLATE

Désir Collection

4 CERTIFICATIONS

The 07x toggle mechanisms comply with the NF EN 60-669-01 standard, according to test report no. 149741-706752A produced by the LCIE on 13/04/2018.

